

170PzS-ET 3000 SOLAR

Vented Flooded Deep Cycle Battery



Performance characteristics


Nominal Voltage	2V
Number of cells	1
Design Life	20 years
Nominal Capacity 25°C (77°F)	
120 hour rate (25.5A, 1.85V)	3064Ah
48 hour rate (58.5A, 1.80V)	2810Ah
10 hour rate (240.8A, 1.8V)	2408Ah
Internal Resistance	
Fully Charged Battery 25°C (77°F)	0.15mOhm
Electrolyte	
Nominal S.G at 25°C = 1.240kg/l	
Operating Temperature Range	-20~55°C
Maximum Discharge Current 25°C (77°F)	2343A
Charge Methods: Constant Voltage Charge 25°C (77°F)	
Cycle use	2.40V (time limited)
Maximum charging current	963.2A
Standby use	2.25V ± 1%
Temperature compensation	-3.0mV/°C/Cell
Terminal Torque	23Nm

Capacities C10-C240

Cell Type Ue (100%) / VPC	C10	C12	C20	C24	C48	C72	C100	C120	C240
Ref Temp	25°C	25°C	25°C	25°C	25°C	25°C	25°C	25°C	25°C

170PzS-ET 3000 SOLAR	2408	2434	2632	2711	2810	2962	2973	3064	3187
----------------------	------	------	------	------	------	------	------	------	------

Cycles vs DOD of OPzS Solar Power

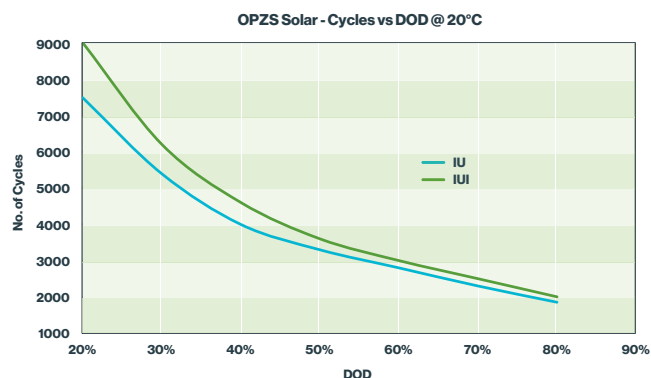

ET/DATAOPZSSOLAR3000V1 0521

Compliant with IEC 60896-11 / IEC 61427

Features

High energy density
Robust tubular positive electrode design, compliant with DIN 40736
Minimal maintenance due to low antimony alloy and large electrolyte volume
Operating temperature -20°C to +55°C
Low self discharge rate of approximately 3% per month at 20°C
EUROBAT design life: Long Life >12 years
Fully recyclable with low CO ₂ footprint
High cyclic performance
3000+ cycles @ 60% DOD @ IUI charging

Applications

Solar/Wind Power Stations
Traffic Systems
Hydro Power Generation
Off Grid Solutions
Telecommunications/ Mobile Phone Stations
Power Distribution Companies

Dimensions and weight

Length	214 mm
Width	399 mm
Height (H1)	772 mm
Total height (H2)	785 mm
Dry weight	110.9 kg
Filled weight	150.7 kg

