

70PzS-ET 1070 SOLAR

Vented Flooded Deep Cycle Battery



Performance characteristics


Nominal Voltage	2V
Number of cells	1
Design Life	20 years
Nominal Capacity 25°C (77°F)	
120 hour rate (9A, 1.85V)	1102Ah
48 hour rate (21A, 1.80V)	1025Ah
10 hour rate (82.9A, 1.8V)	829Ah
Internal Resistance	
Fully Charged Battery 25°C (77°F)	0.35mOhm
Electrolyte	
Nominal S.G at 25°C = 1.240kg/l	
Operating Temperature Range	-20~55°C
Maximum Discharge Current 25°C (77°F)	881A
Charge Methods: Constant Voltage Charge 25°C (77°F)	
Cycle use	2.40V (time limited)
Maximum charging current	332A
Standby use	2.25V ± 1%
Temperature compensation	-3.0mV/°C/Cell
Terminal Torque	23Nm

Capacities C10-C240

Cell Type Ue (100%) / VPC Ref Temp	C10	C12	C20	C24	C48	C72	C100	C120	C240
	1.80	1.80	1.80	1.80	1.80	1.80	1.85	1.85	1.85
	25°C	25°C	25°C	25°C	25°C	25°C	25°C	25°C	25°C

70PzS-ET 1070 SOLAR	829	843	913	940	1025	1096	1069	1102	1146
---------------------	-----	-----	-----	-----	------	------	------	------	------

Cycles vs DOD of OPzS Solar Power

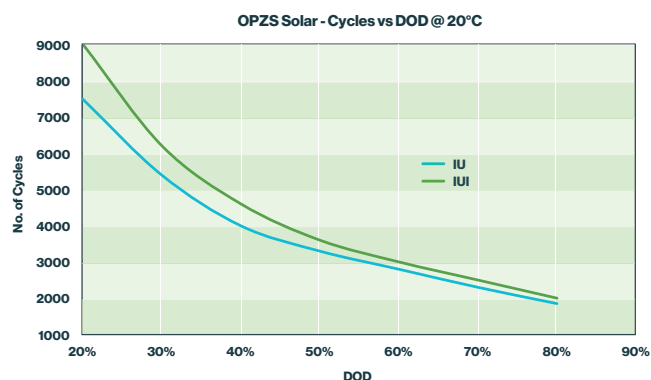

ET/DATAOPZSSOLAR 1070V4 0521

Compliant with IEC 60896-11 / IEC 61427

Features

High energy density
Robust tubular positive electrode design, compliant with DIN 40736
Minimal maintenance due to low antimony alloy and large electrolyte volume
Operating temperature -20°C to +55°C
Low self discharge rate of approximately 3% per month at 20°C
EUROBAT design life: Long Life >12 years
Fully recyclable with low CO ₂ footprint
High cyclic performance
3000+ cycles @ 60% DOD @ IUI charging

Applications

Solar/Wind Power Stations
Traffic Systems
Hydro Power Generation
Off Grid Solutions
Telecommunications/ Mobile Phone Stations
Power Distribution Companies

Dimensions and weight

Length	145 mm
Width	206 mm
Height (H1)	647 mm
Total height (H2)	660 mm
Dry weight	43.0 kg
Filled weight	57.0 kg

